
CS 420

Decidability for Regular Langs


Thursday, November 12, 2026

UMass Boston Computer Science

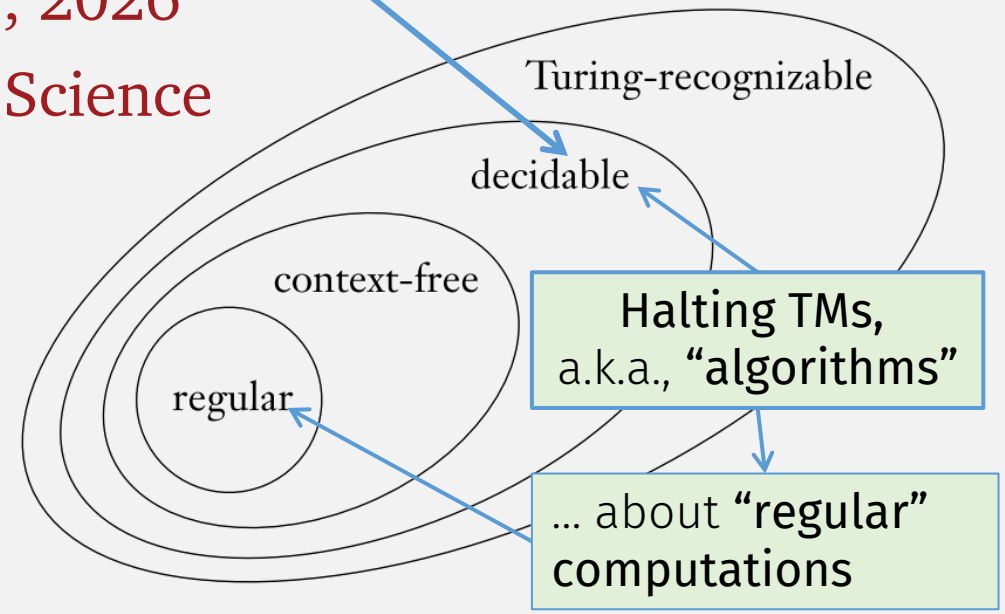

Announcements

- HW 8
  - ~~Due: Thu 11/12~~
  - Due (extended): **Sat 11/14 12:30pm**
- HW 9
  - ~~Out: Thu 11/12~~
  - Out: **Sat 11/14**

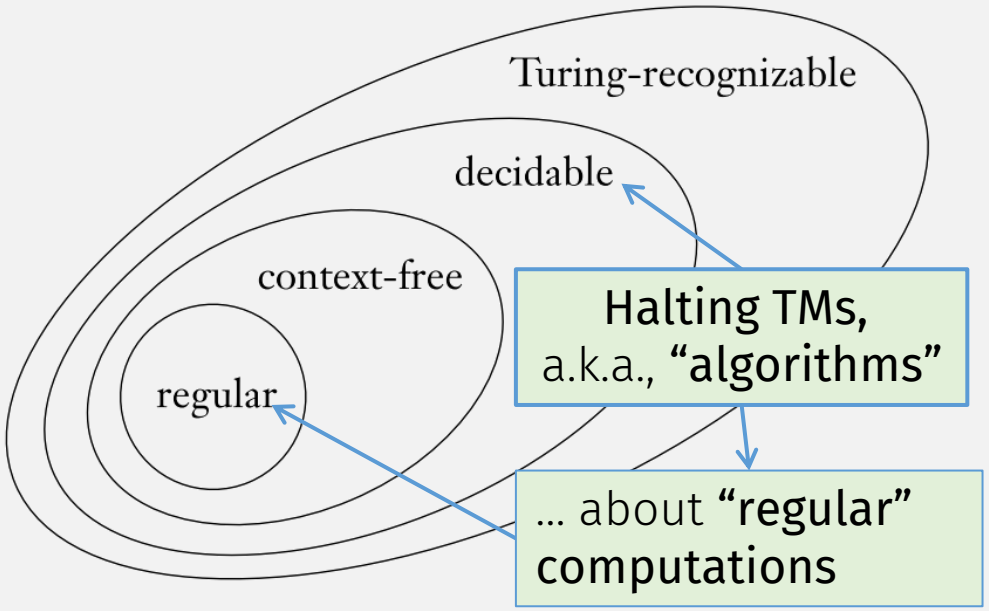

Last Time

DefDecider

How to Design Deciders

- A **Decider** is a **TM …**
  - See previous slides on how to:
    - **write** a **high-level TM description**
    - … that uses **encoded input strings**
  - E.g., let M = **On input** $\langle B, w \rangle$**,** where B **IS-A DFA** AND w **IS-A string: …**

- A **Decider** is a **TM** … that **must always halt**
  - Can only: **accept** or **reject**
  - Cannot: **go into an infinite loop**

- So a **Decider definition must include:** an extra **termination argument:**
  - Explains how **every step in the TM halts**
  - (Pay special attention to **loops**)

- Remember our analogy: **TMs ~ Programs …** so ***Creating*** **a TM ~ Programm*ing***
  - **To design a TM, think of how to write a program (function) that does what you want**

Last Time

DefDecider

How to Design Deciders, Part 2

Hint:

- **Previous theorems / constructions** are a **"library" of reusable TMs**
- **When creating a TM,** use this **"library"** to help you**!**
  - Just like libraries are useful when programming!
- E.g., **"Library" for DFAs:**
  - $\text{CONVERT}_{\text{NFA-DFA}}$, **RegExpr→NFA**
  - $\text{UNION}_{\text{DFA}}$, STAR_{PDA}, UP, REV, BOS
  - Deciders for: A_{DFA}, A_{NFA}, A_{REX}, …

Last Time

Decidable Languages About DFAs

Remember:
TMs ~ programs
Creating TM ~ programming
Previous theorems ~ library

- $A_{\text{DFA}} = \{\langle B, w\rangle \mid B \text{ is a DFA that accepts input string } w\}$
  - **Decider TM:** implements **DFA's extended δ algorithm**, use on B and w


- $A_{\text{NFA}} = \{\langle B, w\rangle \mid B \text{ is an NFA that accepts input string } w\}$
  - Decider TM: uses $\text{CONVERT}_{\text{NFA-DFA}}$ algorithm + A_{DFA} decider

- $A_{\text{REX}} = \{\langle R, w\rangle \mid R \text{ is a regular expression that generates string } w\}$
  - Decider TM: uses **RegExpr→NFA** algorithm + A_{NFA} decider

Flashback: Why Study Algorithms on Computation

To predict what programs will do

(without running them!)

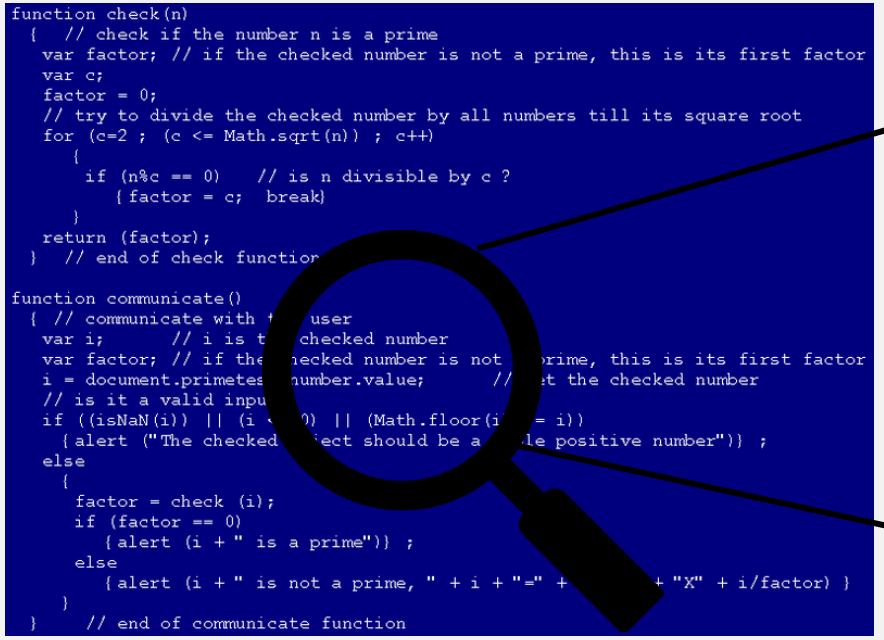



???

Creating Computations: Then and Now

Up to now

Given: **a language**

i.e., what **computation "should do"**

Analogy: **software requirements**

Want to: **construct machine** that recognizes the language

i.e., what **computation "does"**

Analogy: **write code** that follows requirements

Need to: **write Examples Table** to "prove" machine recognizes the language

i.e., does **computation "do"** what it **"should do"**

Analogy: **write tests** to "prove" code "works"

Now

Given: **a language** and a **machine1**

Analogy:
software requirements and **code**

terminating

inputs

Want to: **construct machine2** that determines whether **machine1 recognizes language**


Naïve solution, write infinite tests: **run machine1 …**
- for **every string** in **language** and **check if accepts**
- for **every string not** in **language** and **check if rejects**

Analogy:
(algorithm) **code that proves** (no quotes!) whether **other code "works"** … without **running it**, i.e., **prediction!**

Flashback: Why Study Algorithms on Computation

To predict what programs will do

(without running them!)

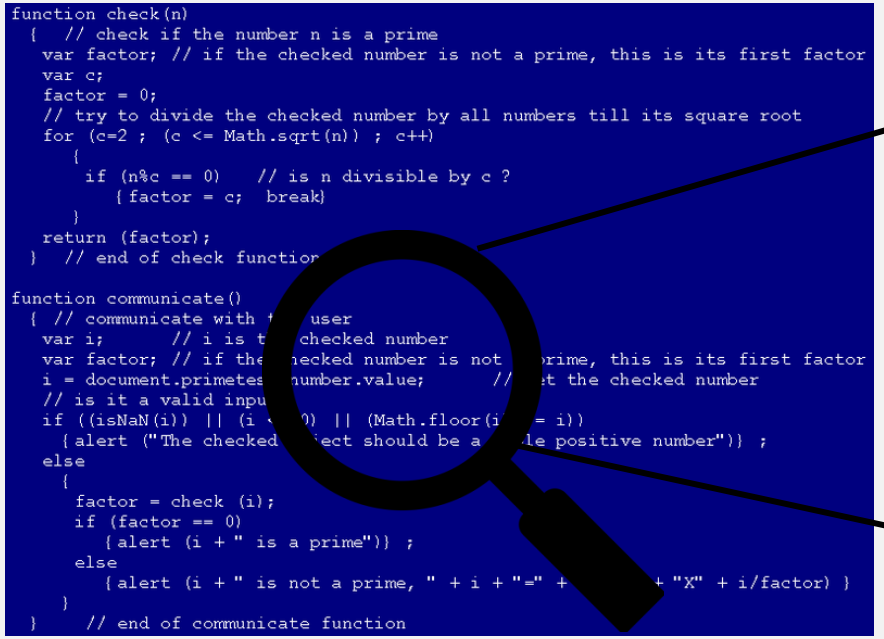

Not possible for all programs! But …



???

Predicting What Some Programs Will Do …

What if we: look at simpler computation models … like DFAs and regular languages!

$L(A) = \text{LangOf}(A)$

Thm: E_{DFA} is a decidable language

$$E_{\text{DFA}} = \{\langle A \rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$$

E_{DFA} is a **language** … of **DFA descriptions**, i.e., strings "$(Q, \Sigma, \delta, q_0, F)$" …

… where **the language of** <u>each</u> **DFA … must be { }**, i.e., **DFA accepts no strings**

Is there a **decider** that **accepts/rejects DFA descriptions …**

… by **predicting something about the DFA's language** (by analyzing its description)

<u>Key idea / question we are about to study:</u>
Compute (**predict**) something about the <u>runtime computation</u> of a **program**, by **analyzing *only*** its <u>source code</u>?

<u>Analogy</u>
DFA's description : a **program's** source code **::**
DFA's language : a **program's** runtime specification

Important: **don't confuse the different languages here!**

$L(A) = \text{LangOf}(A)$

Thm: E_{DFA} is a decidable language

$$E_{\text{DFA}} = \{\langle A \rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$$


Decider:

T = "On input $\langle A \rangle$, where A IS-A DFA:

1. Mark the start state of A.
2. Repeat until no new states get marked:
3. Mark any state that has a transition coming into it from any state that is already marked.
4. If no accept state is marked, *accept*; otherwise, *reject*."

If loop marks at least 1 state on each iteration, then it eventually terminates because there are finite states; else loop terminates

(meta) Compute how the DFA would compute

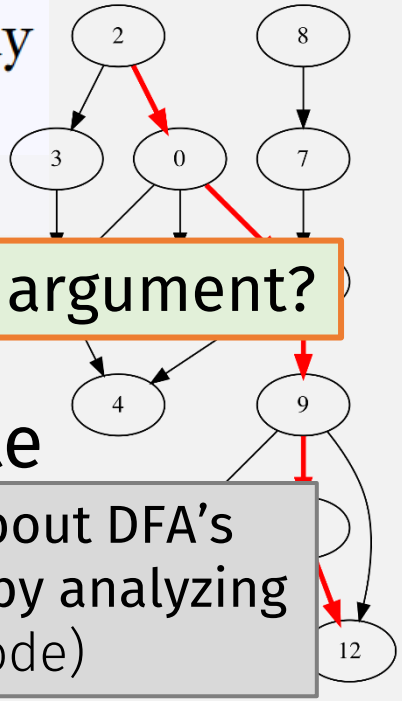

Termination argument?

I.e., this is a "reachability" algorithm …

… check if accept states are "reachable" from start state

Note: TM T is doing a new computation on DFAs! (It does not "run" the DFA!)

Instead: compute something about DFA's language (runtime computation) by analyzing its description (source code)

Thm: EQ_{DFA} is a decidable language

$$EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$$

I.e., Can we **compute whether two DFAs are "equivalent"?**

Replacing "**DFA**" with "**program**" = A "**holy grail**" **of computer science**!



Thm: EQ_{DFA} is a decidable language

$$EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$$

~~(meta) Compute how the DFA would compute i.e., run them~~

I.e., Can we **compute whether** <u>two DFAs are "equivalent"</u>?

<u>A Naïve Attempt</u> (assume alphabet **{a}**):

1. Simulate:
   - A with input **a,** and
   - B with input **a**
   - **Reject** if results are different, else …
2. Simulate :
   - A with input **aa,** and
   - B with input **aa**
   - **Reject** if results are different, else …
- …

This might not terminate!
(Hence it's not a decider)

Key idea


Can we **compute this <u>without</u> running the DFAs**, i.e., by only **examining the DFA's "source code"?**

Thm: EQ_{DFA} is a decidable language

$$EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$$

Trick: Use Symmetric Difference

Symmetric Difference

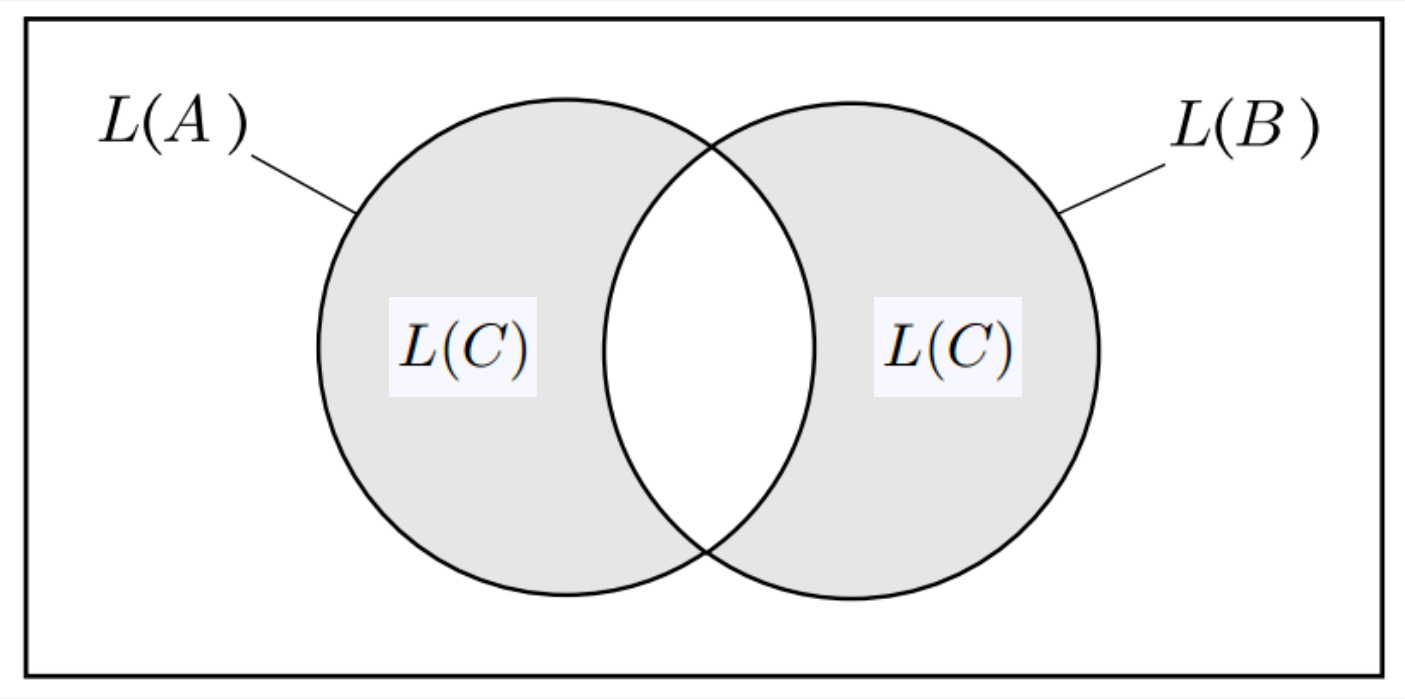

$$L(C) = \left(L(A) \cap \overline{L(B)}\right) \cup \left(\overline{L(A)} \cap L(B)\right)$$

$$L(C) = \emptyset \text{ iff } L(A) = L(B)$$

Thm: EQ_{DFA} is a decidable language


$$EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$$

(proved in prev hws!)

NOTE, This only works because:
regular langs closed under **negation**,
i.e., set complement, **union** and **intersection**

Construct **decider** using 2 parts:

1. Symmetric Difference algo: $L(C) = \left(L(A) \cap \overline{L(B)}\right) \cup \left(\overline{L(A)} \cap L(B)\right)$
   - Construct C = Union, intersection, negation of machines A and B
2. Decider T (from "library") **for:** $E_{\text{DFA}} = \{\langle A\rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$
   - Because $L(C) = \emptyset$ iff $L(A) = L(B)$

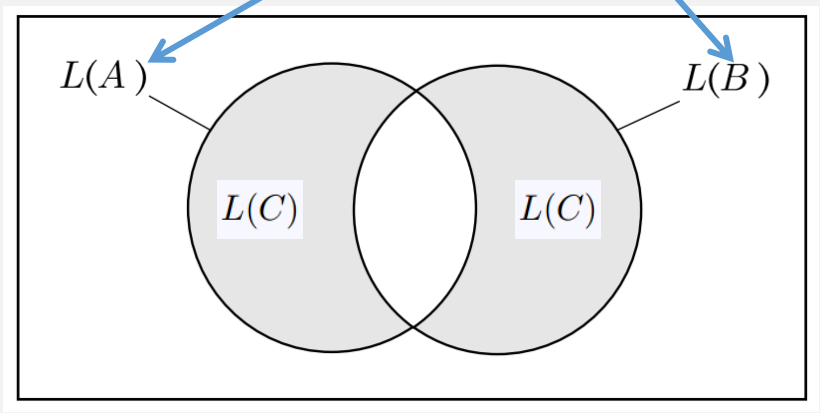

Thm: EQ_{DFA} is a decidable language

$$EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$$

TM input must use same string encoding as lang

Construct **decider** using 2 parts:

1. Symmetric Difference algo: $L(C) = \left(L(A) \cap \overline{L(B)}\right) \cup \left(\overline{L(A)} \cap L(B)\right)$
   - Construct C = Union, intersection, negation of machines A and B
2. Decider T (from "library") for: $E_{\text{DFA}} = \{\langle A\rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$
   - Because $L(C) = \emptyset$ iff $L(A) = L(B)$

F = "On input $\langle A, B\rangle$, where A and B are DFAs:

1. Construct DFA C as described.
2. Run TM T deciding E_{DFA} on input $\langle C\rangle$.
3. If T accepts, *accept*. If T rejects, *reject*."

Termination argument?

From Lecture 1

Predicting What Some Programs Will Do …

microsoft.com/en-us/research/project/slam/

SLAM is a project for checking that software satisfies critical behavioral properties of the interfaces it uses and to aid software engineers in designing interfaces and software that ensure reliable and correct functioning. Static Driver Verifier is a tool in the Windows Driver Development Kit that uses the SLAM verification engine.



"Things like even software verification, this has been the Holy Grail of computer science for many decades but now in some very key areas, for example, driver verification we're building tools that can do actual proof about the software and how it works in order to guarantee the reliability." **Bill Gates, April 18, 2002.** Keynote address at WinHec 2002





Static Driver Verifier Research Platform README

Overview of Static Driver Verifier Research Platform

Static Driver Verifier (SDV) is a compile-time static verification
Research Platform (SDVRP) is an extension to SDV that allows

- Support additional frameworks (or APIs) and write custo
- Experiment with the model checking step.

DFAs!

Model checking

From Wikipedia, the free encyclopedia

In computer science, **model checking** or **property checking** is a method for checking whether a finite-state model of a system meets a given specification (also known as correctness). This is typically

Its "language"

Summary: Algorithms About Regular Langs

- $A_{\text{DFA}} = \{\langle B, w\rangle \mid B \text{ is a DFA that accepts input string } w\}$
  - **Decider:** Simulates DFA by implementing extended δ function
- $A_{\text{NFA}} = \{\langle B, w\rangle \mid B \text{ is an NFA that accepts input string } w\}$
  - **Decider:** Uses **NFA→DFA** decider + A_{DFA} decider
- $A_{\text{REX}} = \{\langle R, w\rangle \mid R \text{ is a regular expression that generates string } w\}$
  - **Decider:** Uses **RegExpr→NFA** decider + A_{NFA} decider
- $E_{\text{DFA}} = \{\langle A\rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$
  - **Decider:** Reachability algorithm

Lang of the DFA

- $EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$
  - **Decider:** Uses complement and intersection closure construction + E_{DFA} decider



Remember:
TMs ~ programs
Creating TM ~ programming
Previous theorems ~ library

Next: Algorithms (Decider TMs) for CFLs?


- What can we predict about CFGs or PDAs?

Thm: A_{CFG} is a decidable language

$$A_{\mathsf{CFG}} = \{\langle G, w\rangle \mid G \text{ is a CFG that generates string } w\}$$

- This is a very practically important problem …
- … equivalent to:
  - **Algorithm** determining: possible to **parse** "program" w for a **programming language** with **grammar** G?


- A Decider for this problem could … ?
  - Try every possible derivation of G, and check if it's equal to w?
  - But this might never halt
    - E.g., what if there are **recursive** rules like: $\mathbf{S \to 0S}$ or $\mathbf{S \to S}$
  - This TM would be a recognizer but not a decider



Idea: can the TM stop checking after some length?
- I.e., Is there an **upper bound on the number of derivation steps?**

Chomsky Normal Form

Noam Chomsky

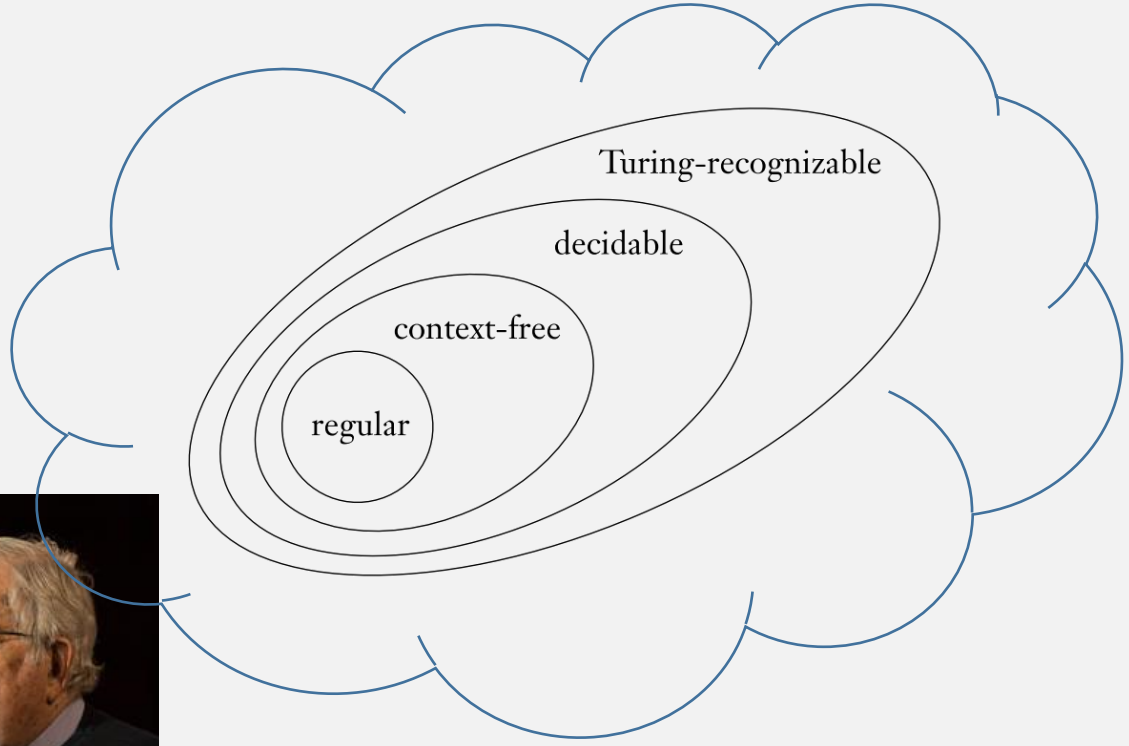



He came up with this hierarchy of languages

Chomsky Normal Form

A context-free grammar is in ***Chomsky normal form*** if every rule is of the form

$$A \to BC$$
$$A \to a$$

(non-start) Variables only

2 rule shapes

Terminals only

where a is any terminal and A, B, and C are any variables—except that B and C may not be the start variable. In addition, we permit the rule $S \to \varepsilon$, where S is the start variable.

Chomsky Normal Form Example

- $S \rightarrow AB$
- $A \rightarrow AB$
- $A \rightarrow \mathbf{a}$
- $B \rightarrow \mathbf{b}$

Makes the string long enough

Convert variables to terminals

- To generate string of length: 2
  - Use S rule: 1 time; Use A or B rules: 2 times
  - $S \Rightarrow AB \Rightarrow \mathbf{a}B \Rightarrow \mathbf{ab}$
  - Derivation total steps: 1 + 2 = 3
- To generate string of length: 3
  - Use S rule: 1 time; A rule: 1 time; A or B rules: 3 times
  - $S \Rightarrow AB \Rightarrow AAB \Rightarrow \mathbf{a}AB \Rightarrow \mathbf{aa}B \Rightarrow \mathbf{aab}$
  - Derivation total steps: 1 + 1 + 3 = 5
- To generate string of length: 4
  - Use S rule: 1 time ; A rule: 2 times; A or B rules: 4 times
  - $S \Rightarrow AB \Rightarrow AAB \Rightarrow AAAB \Rightarrow \mathbf{a}AAB \Rightarrow \mathbf{aa}AB \Rightarrow \mathbf{aaa}B \Rightarrow \mathbf{aaab}$
  - Derivation total steps: 3 + 4 = 7
- ...

A context-free grammar is in ***Chomsky normal form*** if every rule is of the form

☑ $A \rightarrow BC$
$A \rightarrow a$

2 rule shapes

where a is any terminal and A, B, and C are any variables—except that B and C may not be the start variable. In addition, we permit the rule $S \rightarrow \epsilon$, where S is the start variable.

Chomsky Normal Form: Number of Steps

To generate a string of length n:

- $n - 1$ steps: to generate n variables
- $+ n$ steps: to turn each variable into a terminal
- Total: $2n - 1$ steps

Makes the string long enough

Convert string to terminals

(A *finite* number of steps!)

Chomsky normal form

$A \rightarrow BC$ Use n-1 times

$A \rightarrow a$ Use n times

Thm: A_{CFG} is a decidable language

$$A_{\text{CFG}} = \{\langle G, w\rangle \mid G \text{ is a CFG that generates string } w\}$$

Proof: create the decider:

S = "On input $\langle G, w\rangle$, where G IS-A CFG AND w IS-A string:

1. Convert G to an equivalent grammar in Chomsky normal form.
2. List all derivations with $2n - 1$ steps, where n is the length of w; except if $n = 0$, then instead list all derivations with one step.
3. If any of these derivations generate w, *accept*; if not, *reject*."

We first need to prove this is true for all CFGs!

Step 1: Conversion to Chomsky Normal Form is an algorithm …
Step 2:
Step 3:

Termination argument?

Thm: Every CFG has a Chomsky Normal Form

Proof: Create algorithm to convert any CFG into Chomsky Normal Form

Chomsky normal form

$A \to BC$

$A \to a$

1. Add new start variable S_0 that does not appear on any RHS
   - I.e., add rule $S_0 \to S$, where S is old start var

$$S \to ASA \mid \mathtt{a}B$$
$$A \to B \mid S$$
$$B \to \mathtt{b} \mid \varepsilon$$



$$\boldsymbol{S_0 \to S}$$
$$S \to ASA \mid \mathtt{a}B$$
$$A \to B \mid S$$
$$B \to \mathtt{b} \mid \varepsilon$$


Thm: Every CFG has a Chomsky Normal Form

Chomsky normal form

$A \to BC$

$A \to a$

1. Add new start variable S_0 that does not appear on any RHS
   - I.e., add rule $S_0 \to S$, where S is old start var
2. Remove all "empty" rules of the form $A \to \varepsilon$
   - A must not be the start variable
   - Then for every rule with A on RHS, add new rule with A deleted
     - E.g., If $R \to uAv$ is a rule, add $R \to uv$
   - Must cover all combinations if A appears more than once in a RHS
     - E.g., if $R \to uAvAw$ is a rule, add 3 rules: $R \to uvAw$, $R \to uAvw$, $R \to uvw$

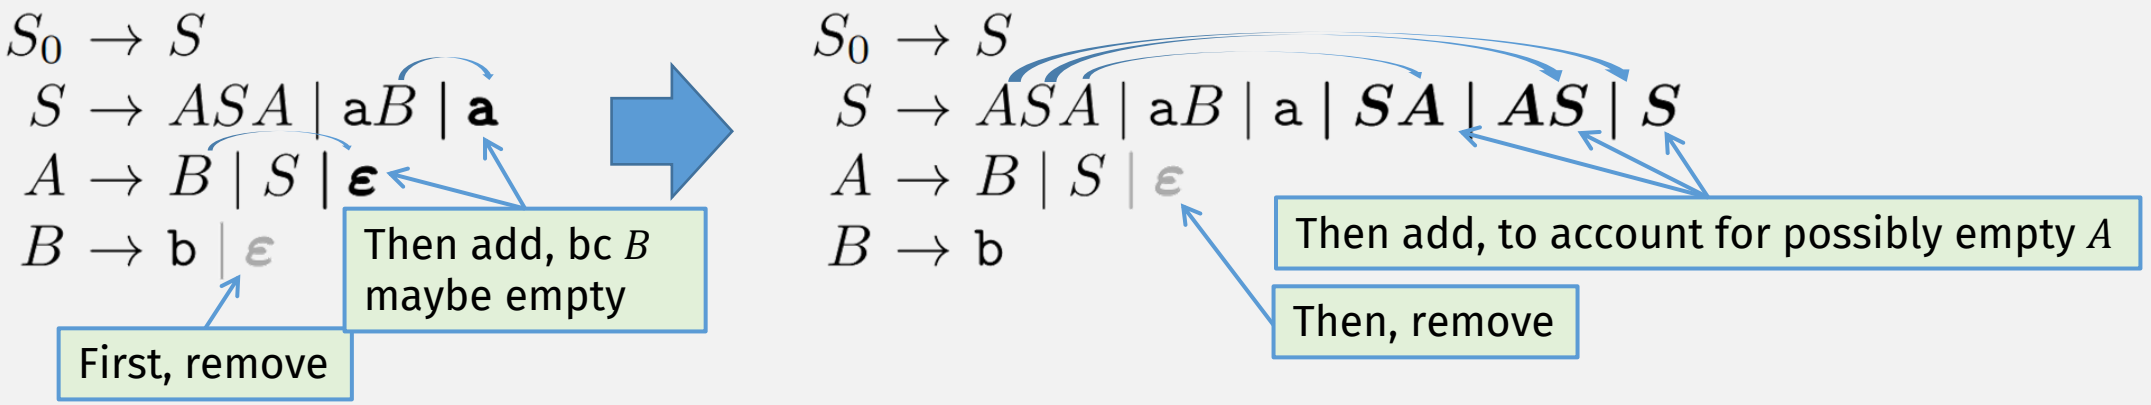

Thm: Every CFG has a Chomsky Normal Form

Chomsky normal form

$A \to BC$

$A \to a$

1. Add new start variable S_0 that does not appear on any RHS
   - I.e., add rule $S_0 \to S$, where S is old start var
2. Remove all "empty" rules of the form $A \to \varepsilon$
   - A must not be the start variable
   - Then for every rule with A on RHS, add new rule with A deleted
     - E.g., If $R \to uAv$ is a rule, add $R \to uv$
   - Must cover all combinations if A appears more than once in a RHS
     - E.g., if $R \to uAvAw$ is a rule, add 3 rules: $R \to uvAw$, $R \to uAvw$, $R \to uvw$
3. Remove all "unit" rules of the form $A \to B$
   - Then, for every rule $B \to u$, add rule $A \to u$

$S_0 \to S$
$S \to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS \mid S$
$A \to B \mid S$
$B \to \mathtt{b}$

Remove, no add (same variable)

$S_0 \to S \mid \boldsymbol{ASA} \mid \mathbf{a}\boldsymbol{B} \mid \mathbf{a} \mid \boldsymbol{SA} \mid \boldsymbol{AS}$
$S \to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS$
$A \to B \mid S$
$B \to \mathtt{b}$

Remove, then add S RHSs to S_0

$S_0 \to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS$
$S \to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS$
$A \to S \mid \mathtt{b} \mid \boldsymbol{ASA} \mid \mathbf{a}\boldsymbol{B} \mid \mathbf{a} \mid \boldsymbol{SA} \mid \boldsymbol{AS}$
$B \to \mathtt{b}$

Remove, then add S RHSs to A

Termination argument of this algorithm?

Thm: Every CFG has a Chomsky Normal Form

Chomsky normal form

$A \to BC$

$A \to a$

1. Add new start variable S_0 that does not appear on any RHS
   - I.e., add rule $S_0 \to S$, where S is old start var
2. Remove all "empty" rules of the form $A \to \varepsilon$
   - A must not be the start variable
   - Then for every rule with A on RHS, add new rule with A deleted
     - E.g., If $R \to uAv$ is a rule, add $R \to uv$
   - Must cover all combinations if A appears more than once in a RHS
     - E.g., if $R \to uAvAw$ is a rule, add 3 rules: $R \to uvAw$, $R \to uAvw$, $R \to uvw$
3. Remove all "unit" rules of the form $A \to B$
   - Then, for every rule $B \to u$, add rule $A \to u$
4. Split up rules with RHS longer than length 2
   - E.g., $A \to wxyz$ becomes $A \to wB$, $B \to xC$, $C \to yz$
5. Replace all terminals on RHS with new rule
   - E.g., for above, add $W \to w$, $X \to x$, $Y \to y$, $Z \to z$

$$
\begin{aligned}
S_0 &\to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS \\
S &\to ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS \\
A &\to \mathtt{b} \mid ASA \mid \mathtt{a}B \mid \mathtt{a} \mid SA \mid AS \\
B &\to \mathtt{b}
\end{aligned}
$$



$$
\begin{aligned}
S_0 &\to AA_1 \mid UB \mid \mathtt{a} \mid SA \mid AS \\
S &\to AA_1 \mid UB \mid \mathtt{a} \mid SA \mid AS \\
A &\to \mathtt{b} \mid AA_1 \mid UB \mid \mathtt{a} \mid SA \mid AS \\
A_1 &\to SA \\
U &\to \mathtt{a} \\
B &\to \mathtt{b}
\end{aligned}
$$

Thm: A_{CFG} is a decidable language

$$A_{\text{CFG}} = \{\langle G, w\rangle \mid G \text{ is a CFG that generates string } w\}$$

Proof: create the decider:

S = "On input $\langle G, w\rangle$, where G IS-A CFG AND w IS-A string:

1. Convert G to an equivalent grammar in Chomsky normal form.
2. List all derivations with $2n-1$ steps, where n is the length of w; except if $n = 0$, then instead list all derivations with one step.
3. If any of these derivations generate w, *accept*; if not, *reject*."

We first need to prove this is true for all CFGs!

Termination argument:
Step 1: any CFG has only a finite # rules
Step 2: $2n$-1 = finite # of derivations to check
Step 3: checking finite number of derivations

Thm: E_{CFG} is a decidable language

$$E_{\text{CFG}} = \{\langle G \rangle \mid G \text{ is a CFG and } L(G) = \emptyset\}$$

Recall:

$$E_{\text{DFA}} = \{\langle A \rangle \mid A \text{ is a DFA and } L(A) = \emptyset\}$$

T = "On input $\langle A \rangle$, where A IS-A DFA:

1. Mark the start state of A.
2. Repeat until no new states get marked:
3. Mark any state that has a transition coming into it from any state that is already marked.
4. If no accept state is marked, *accept*; otherwise, *reject*."

"Reachability" (of accept state from start state) algorithm

Can we compute "reachability" for a CFG?

Thm: E_{CFG} is a decidable language

$$E_{\text{CFG}} = \{\langle G \rangle \mid G \text{ is a CFG and } L(G) = \emptyset\}$$

Proof: create **decider** that calculates reachability for grammar G

- Go backwards, start from **terminals**, to avoid getting stuck in looping rules

$R =$ "On input $\langle G \rangle$, where G IS-A CFG:

1. Mark all terminal symbols in G.
2. Repeat until no new variables get marked:
3. Mark any variable A where G has a rule $A \to U_1 U_2 \cdots U_k$ and each symbol $U_1, \ldots, U_k$ has already been marked.
4. If the start variable is not marked, *accept*; otherwise, *reject*."

Loop marks 1 new variable on each iteration or stops: it eventually terminates because there are a finite # of variables

Can we compute "reachability" for a CFG?

mination argument?


Thm: EQ_{CFG} is a decidable language?



$$EQ_{\text{CFG}} = \{\langle G, H\rangle \mid G \text{ and } H \text{ are CFGs and } L(G) = L(H)\}$$

Recall: $EQ_{\text{DFA}} = \{\langle A, B\rangle \mid A \text{ and } B \text{ are DFAs and } L(A) = L(B)\}$

- Used Symmetric Difference

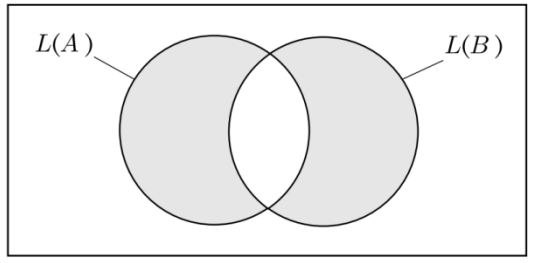

$$L(C) = \emptyset \text{ iff } L(A) = L(B)$$

  - where C = complement, union, intersection of machines A and B
- Can't do this for CFLs!
  - Intersection and complement are not closed for CFLs!!!

Intersection of CFLs is Not Closed!

Proof (by contradiction), Assume **intersection is closed for CFLs**

- Then **intersection of these CFLs should be a CFL:**

$$A = \{\mathtt{a}^m\mathtt{b}^n\mathtt{c}^n \mid m, n \geq 0\}$$

$$B = \{\mathtt{a}^n\mathtt{b}^n\mathtt{c}^m \mid m, n \geq 0\}$$

- But $A \cap B = \{\mathtt{a}^n\mathtt{b}^n\mathtt{c}^n \mid n \geq 0\}$

- **… which is not a CFL!** (So we have a contradiction)

Complement of a CFL is not Closed!

- Assume **CFLs closed under complement,** then:

$$\text{if } G_1 \text{ and } G_2 \quad \text{context-free}$$

$$\overline{L(G_1)} \text{ and } \overline{L(G_2)} \quad \text{context-free}$$ From the assumption

$$\overline{L(G_1)} \cup \overline{L(G_2)} \quad \text{context-free}$$ Union of CFLs is closed

$$\overline{\overline{L(G_1)} \cup \overline{L(G_2)}} \quad \text{context-free}$$ From the assumption

$$L(G_1) \cap L(G_2) \quad \text{context-free}$$ DeMorgan's Law!

But intersection is not closed for CFLS (prev slide)

Thm: EQ_{CFG} is a decidable language?

$$EQ_{\text{CFG}} = \{\langle G, H \rangle \mid G \text{ and } H \text{ are CFGs and } L(G) = L(H)\}$$

- No! 
  - There's no algorithm to decide whether two grammars are equivalent!
- **It's not recognizable either!** (Can't create <u>any</u> TM to do this!!!)
  - (details later)
- I.e., **this is an <u>impossible computation</u>!**

  (has no machine that recognizes it!)



Summary Algorithms About CFLs

- $A_{\text{CFG}} = \{\langle G, w\rangle \mid G \text{ is a CFG that generates string } w\}$
  - **Decider:** Convert grammar to Chomsky Normal Form
  - Then check all possible derivations up to length $2|w| - 1$ steps

- $E_{\text{CFG}} = \{\langle G\rangle \mid G \text{ is a CFG and } L(G) = \emptyset\}$
  - **Decider:** Compute "reachability" of start variable from terminals

- $EQ_{\text{CFG}} = \{\langle G, H\rangle \mid G \text{ and } H \text{ are CFGs and } L(G) = L(H)\}$
  - We couldn't prove that this is decidable!
  - (So you cant use this theorem when creating another decider)